



PERIBEST I70 DATASHEET



TECHNICAL SPECIFICATIONS	MODEL I70
Max. Flow (continuous)	20800 l/h
Capacity	7,9 l/rev
Max. Discharge Pressure	10 bar
Max. Temperature	80 °C
Inner Diameter	70 mm.
Hose material	NR, EPDM and NBR (Food Grade)
Connections material	AISI-316, PP, PVDF (PTFE)
Pump casing material	Cast Iron (powder coated)
Rollers material	Hard aluminium (Anodized)

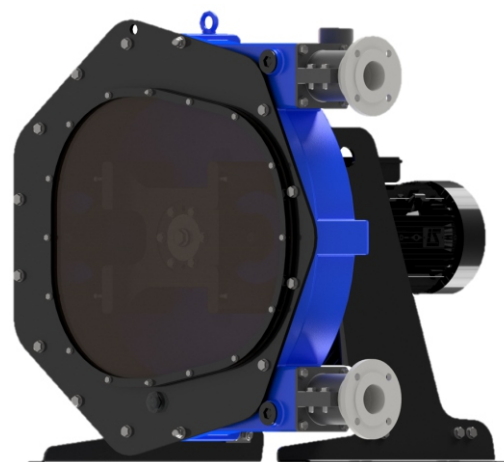

MAIN FEATURES AND BENEFITS

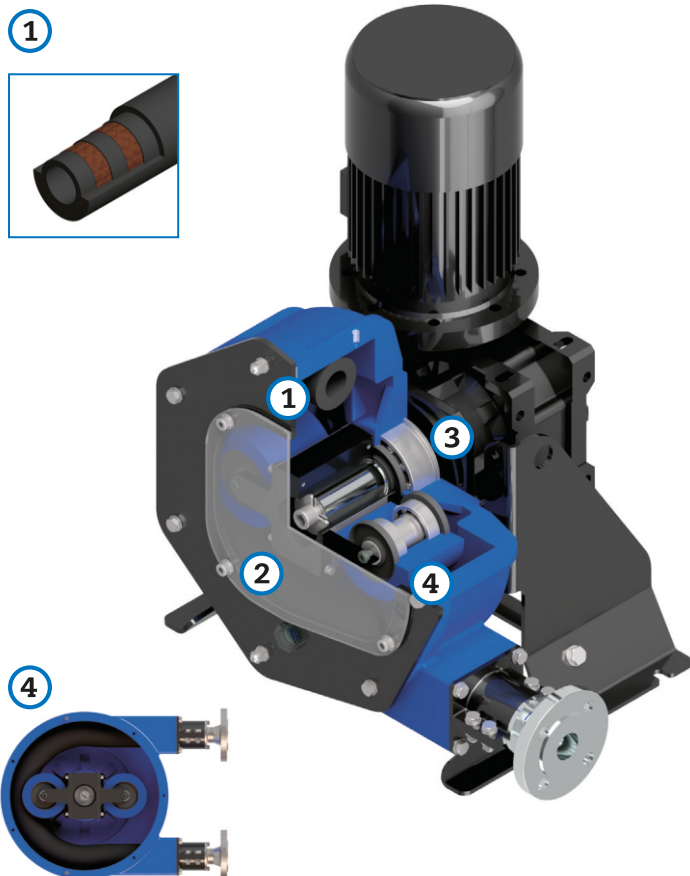

1 LATEST TECHNOLOGY PERISTALTIC HOSE.

SAVING ON HOSE CONSUMPTION AND EASE OF INSTALLATION DOWNTIME OPTIMISATION.

2 EASE OF ASSEMBLY, OPERATION AND MAINTENANCE.

SAVING ON MAINTENANCE COSTS AND EASE OF ASSEMBLY. LESS DOWNTIME.

3 EXTREMELY HEAVY DUTY DESIGN FOR THE MOST DEMANDING APPLICATIONS UP TO 10 BAR.


UNMATCHED PUMP LIFE AND EXCELLENT EQUIPMENT PERFORMANCE UNDER ANY OPERATING CONDITIONS HOWEVER DEMANDING.

4 XXL ROLLER TECHNOLOGY.


MAJOR ENERGY SAVINGS, HIGHER NUMBER OF HOSE WORKING HOURS AND EASE OF OPERATION.

REQUIRED
MOTOR POWER (KW)

PRODUCT
TEMPERATURE (°C)

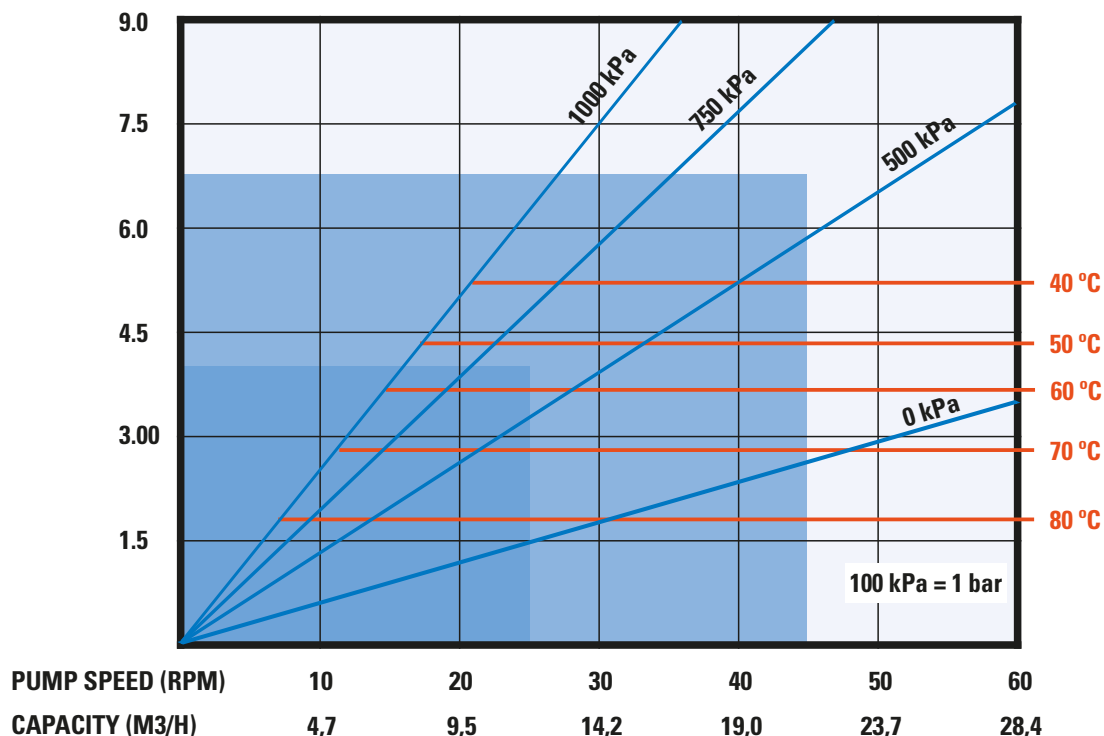

PRESSURE (kPa)	0 kPa	500 kPa	750 kPa	1000 kPa
TORQUE (Nm)	570	1300	1850	2390

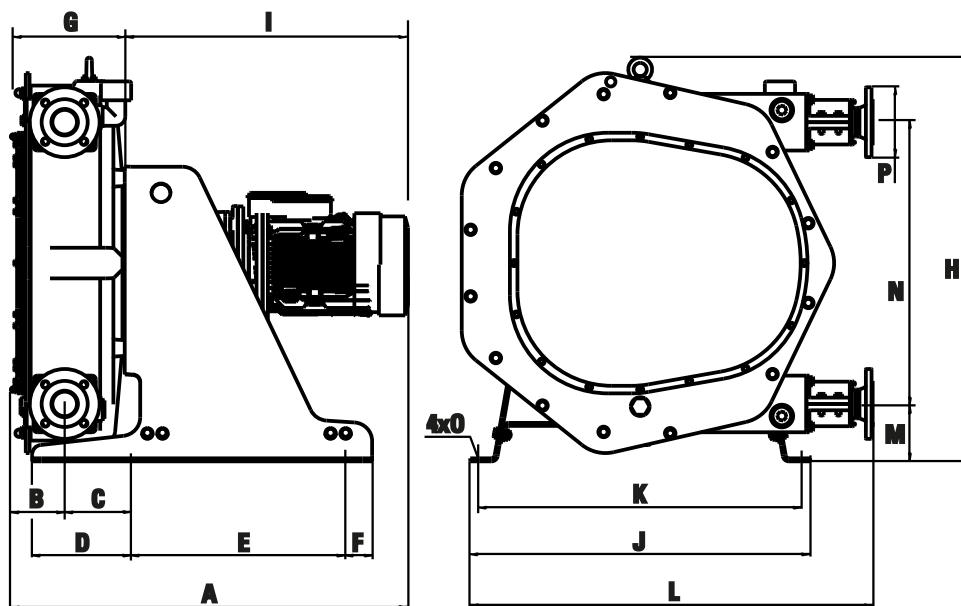

MODEL	A*	B	C	D	E	F	G	H	I*	J	K	L	M	N	O	P
I70	957	131	234	320	500	80	173	1069	736	900	850	1066	152	746	20	DN-65

*Depending on the driver, dimensions could change.

www.peribest.com

Production Plant
PeriBest Pumps S.L.
 C/ Can Parellada, num. 26 Nave 10
 Pol. Ind. Sector H
 E-08170 Montornès del Vallès
Barcelona
 Tel. +34 935 992 214